

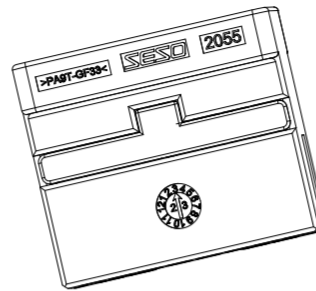

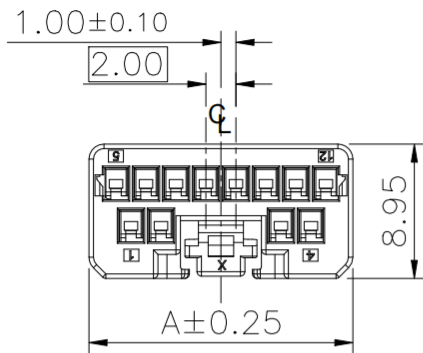


RoHS


This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules






3D Views

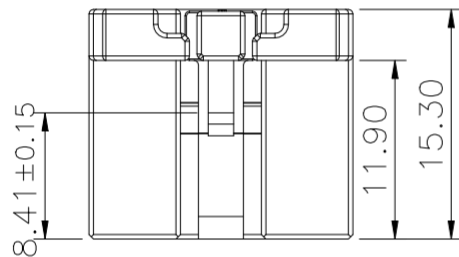

8-12Pin

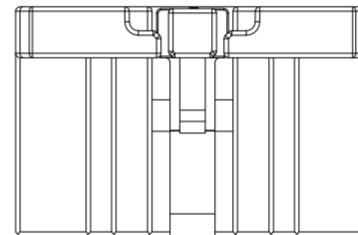

16Pin

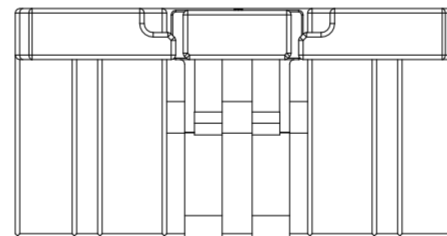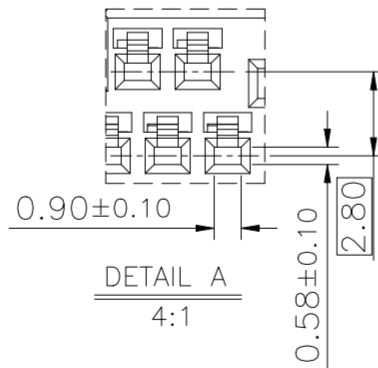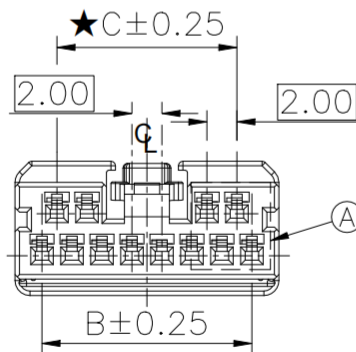

20-24Pin

Specifications :

- Voltage rating: 60V Max. AC/DC
- Current rating: 5A(Mono-Pole Power Supply)
2A (All-Pole Power supply)
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: $\geq 100M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$
- Symbols for SPC dimensions: "★"
- Product Specification: PS-2055-1
- Packaging:
See SESO drawing PK-2055A-DXX-9TBK

2055 A-D XX-9T BK
① ② ③ ④ ⑤ ⑥

- ① Series No.:2055
- ② Category:A-Housing Sub-Assembly
- ③ Row No:Double Row
- ④ Pin No.:XX-08~24Pin
- ⑤ Plastic Material:9T-PA9T UL94V-0
- ⑥ Color:BK-Black



No.of Pos.	Dimensions/mm		
	A	B	C
08	13.60	10.00	8.00
12	17.60	14.00	12.00
16	23.60	18.00	20.00
20	29.60	26.00	24.00
24	33.60	30.00	28.00

GENERAL TOLERANCE					
.X ±0.35					
.XX ±0.25					
.XXX±0.15					
X.* ±2°					
PROJECT					
DATE					
20250107	A0	/	Initial release	DingPing Ou	Larry Yang
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL





SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.

APPROVAL	CHECK	DRAWN	DATE
Jack Zhang	Larry Yang	DingPing OU	2023/04/28


PART NO.				
2055A-DXX-9TBK				
TITLE				
2.00mm WTB CONN				
UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	CD

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

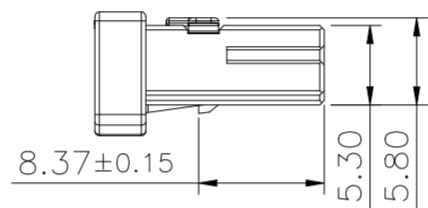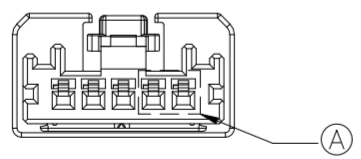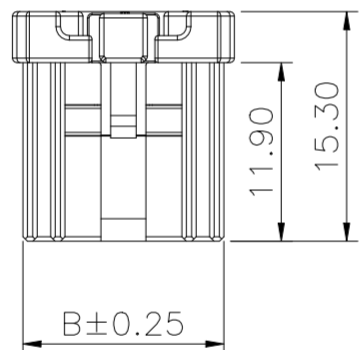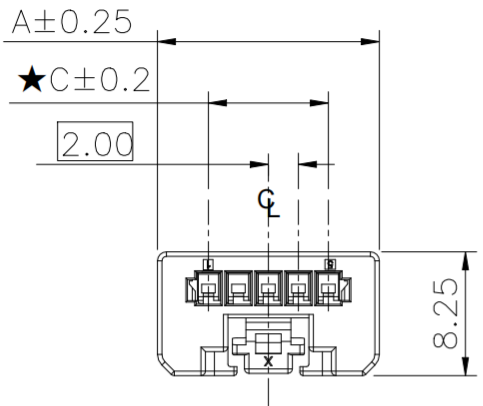

3D Views

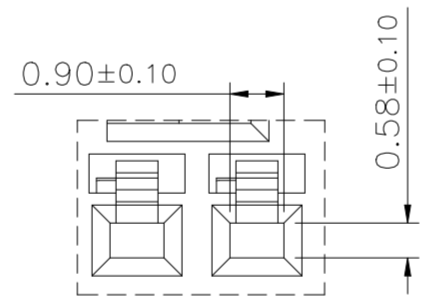

DETAIL A
4:1

- Specifications :
- Voltage rating: 60V Max. AC/DC
 - Current rating: 5A(Mono-Pole Power Supply)
2A (All-Pole Power supply)
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -40°C~+125°C
 - Insulation resistance: ≥100MΩ
 - Contact resistance: ≤10mΩ
 - After environmental testing: ≤20mΩ
 - Symbols for SPC dimensions: "★"
 - Product Specification: PS-2055-1
 - Packaging:
see SESO drawing PK-2055A-XX-9TBK

2055 A-XX-9T BK
① ② ③ ④ ⑤

- ① Series No.:2055
- ② Category:A-Housing Sub-Assembly
- ③ Pin No.:XX-02~05Pin
- ④ Plastic Material:9T-PA9T UL94V-0
- ⑤ Color:BK-Black



No.of Pos.	Dimensions/mm		
	A	B	C
02	8.80	7.40	2.00
03	10.80	9.40	4.00
04	12.80	11.40	6.00
05	14.80	13.40	8.00







20250109	A0	/	Initial release	DingPing Ou	Larry Yang
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL

GENERAL TOLERANCE		SMS 东莞市思索技术股份有限公司 Dongguan SESO Technology Co.,Ltd.			
.X	±0.35				
.XX	±0.25				
.XXX	±0.15				
X.*	±2*				
PROJECT		APPROVAL	CHECK	DRAWN	DATE
		Jack Zhang	Larry Yang	DingPing OU	2023/04/28

PART NO. 2055A-XX-9TBK				
TITLE 2.00mm WTB CONN				
UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	CD

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005
of Environmental&Material Management Rules

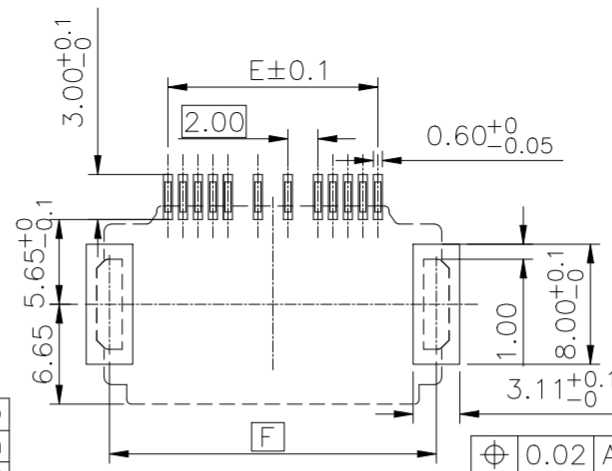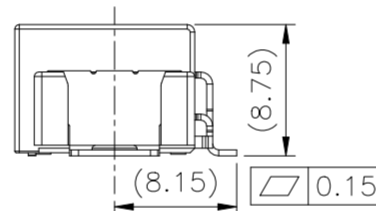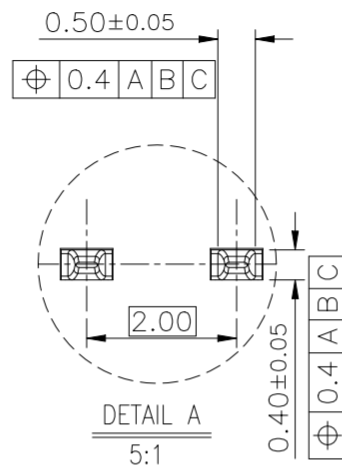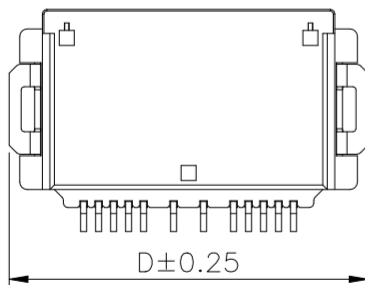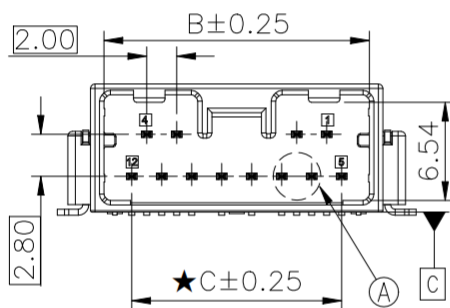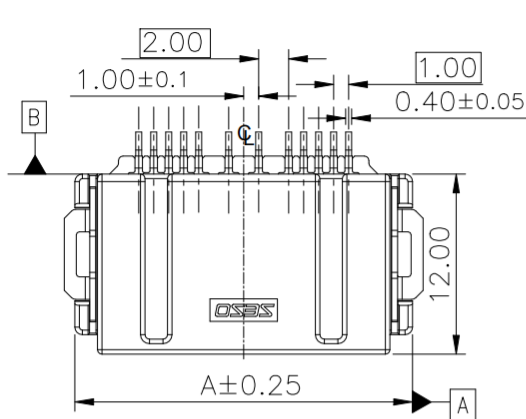

PCB THICKNESS :1.6
GENERAL TOLERANCES:±0.05



Specifications :

- Voltage rating: 60V Max. AC/DC
- Current rating: 5A(Mono-Pole Power Supply)
2A (All-Pole Power supply)
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Material(Pin): Brass
- Mates With SESO Housing: 2055A
- Symbols for SPC dimensions: "★"
- Product Specification: PS-2055-1
- Packaging: see SESO drawing
PK-2055WRS-DXX-9TSW1BR

2055 W R S-D XX-9T SW1 B R
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩






- ① Series No.:2055
- ② Category:W-Wafer
- ③ Connector Type:R-Right Angle 90°
- ④ Mounting Type:S-SMT
- ⑤ Row No.:D-Double Row
- ⑥ Pin No.:XX-08~24Pin
- ⑦ Plastic Material:9T-PA9T UL94V-0
- ⑧ Plating Code:SW1-Matte Tin
Underplate:Ni 40~120u"(1~3um) overall
Top Plating:Sn 80~200u"(2~5um) overall
- ⑨ Color:B-Black
- ⑩ Packing: R-Reel

No.of Pos.	Dimensions/mm					
	A	B	C	D	E	F
08	18.52	13.70	10.00	19.93	10.00	17.80
12	22.52	17.70	14.00	23.93	14.00	21.80
16	28.52	23.70	20.00	29.93	20.00	27.80
20	34.52	29.70	26.00	35.93	26.00	33.80
24	38.52	33.70	30.00	39.93	30.00	37.80

						GENERAL TOLERANCE				SMS 东莞市思索技术股份有限公司 Dongguan SESO Technology Co.,Ltd.				PART NO.				
						.X ±0.35								2055WRS-DXX-9TSW1BR				
						.XX ±0.25								TITLE				
						.XXX±0.15								2.00mm WTB CONN				
20250109	A0	/	Initial release	DingPing Ou	Larry Yang	X: ±2"				APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT				Jack Zhang	Larry Yang	DingPing Ou	2023/04/28	mm	1:1	1/1	A0	CD
1		2		3		4		5		6		7		8				

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005
of Environmental&Material Management Rules

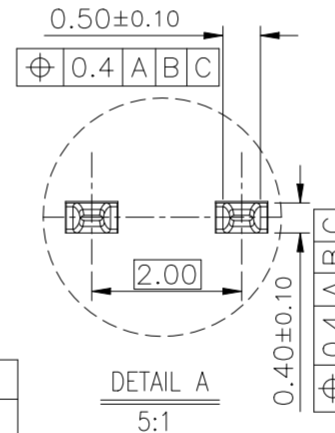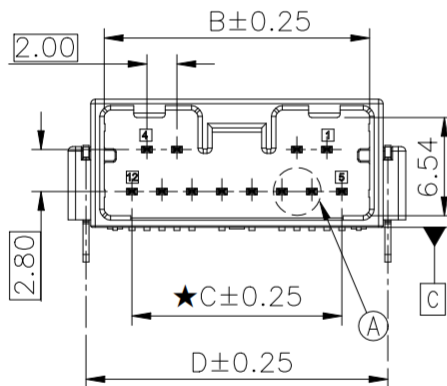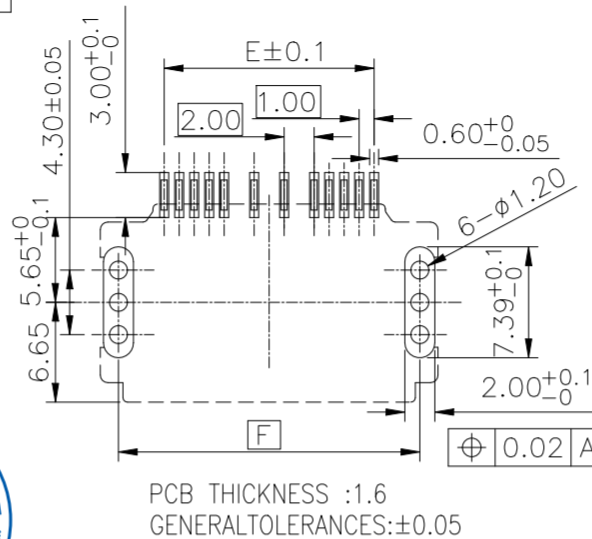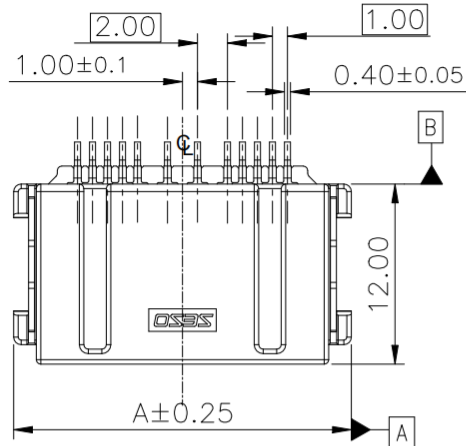

No.of Pos.	Dimensions/mm					
	A	B	C	D	E	F
08	18.52	13.70	10.00	16.13	10.00	16.10
12	22.52	17.70	14.00	20.13	14.00	20.10
16	28.52	23.70	18.00	26.13	18.00	26.10
20	34.52	29.70	26.00	32.13	26.00	32.10
24	38.52	33.70	30.00	36.13	30.00	36.10

Specifications :

- Voltage rating: 60V Max. AC/DC
- Current rating: 5A(Mono-Pole Power Supply)
2A (All-Pole Power supply)
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Material(Pin): Brass
- Mates With SESO Housing: 2055A
- Symbols for SPC dimensions:" ★ "
- Product Specification: PS-2055-1
- Packaging: see SESO drawing
PK-2055WRS-DXXC-9TSW1BR

2055 W R S-D XX C-9T SW1 B R
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

- ① Series No.:2055
- ② Category:W-Wafer
- ③ Connector Type:R-Right Angle 90°
- ④ Mounting Type:S-SMT
- ⑤ Row No.:D-Double Row
- ⑥ Pin No.:XX-08~24Pin
- ⑦ Special NO.:C-With Harpoon
- ⑧ Plastic Material:9T-PA9T UL94V-0
- ⑨ Plating Code:SW1-Matte Tin
Underplate:Ni 40~120u"(1~3um) overall
Top Plating:Sn 80~200u"(2~5um) overall
- ⑩ Color:B-Black
- ⑪ Packing: R-Reel

20250107	A0	/	Initial release	DingPing Ou	Larry Yang
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL

GENERAL TOLERANCE

.X ±0.35
.XX ±0.25
.XXX±0.15
X.' ±2'

PROJECT



SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.





APPROVAL CHECK DRAWN DATE

Jack Zhang Larry Yang DingPing Ou 2023/04/28



PART NO.				
2055WRS-DXXC-9TSW1BR				
TITLE				
2.00mm WTB CONN				
UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	CD

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005
of Environmental&Material Management Rules

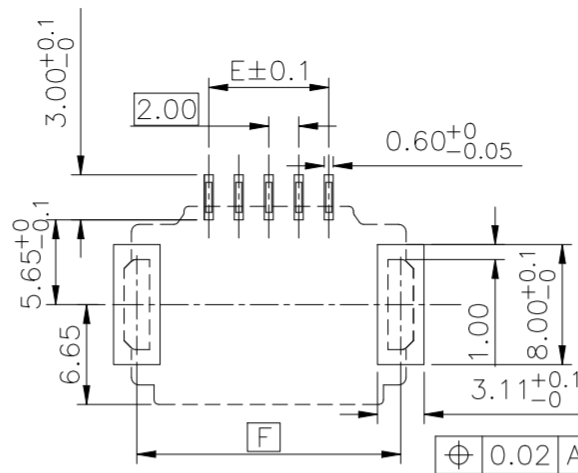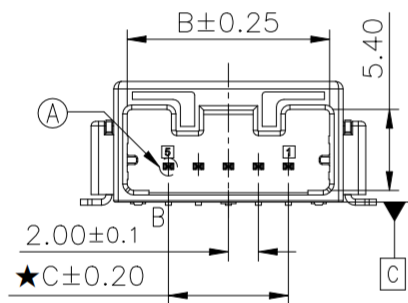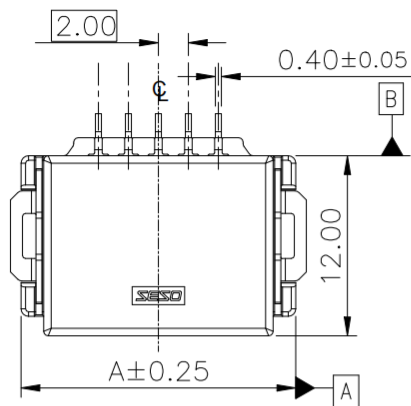

PCB THICKNESS :1.6
GENERAL TOLERANCES:±0.05

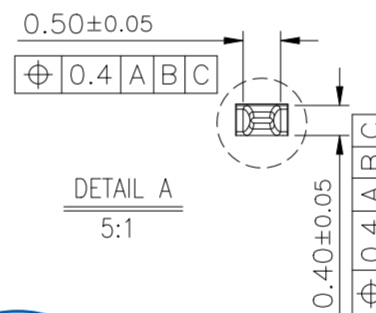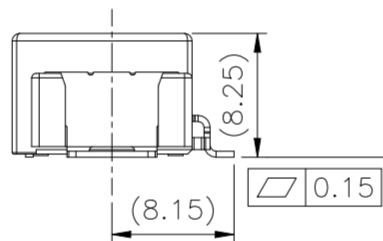

DETAIL A
5:1



Specifications :

- Voltage rating: 60V Max. AC/DC
- Current rating: 5A(Mono-Pole Power Supply)
2A (All-Pole Power supply)
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Material(Pin): Brass
- Mates With SESO Housing: 2055A
- Symbols for SPC dimensions: "★"
- Product Specification: PS-2055-1
- Packaging: see SESO drawing
PK-2055WRS-XX-9TSW1BR

2055 W R S-XX-9T SW1 B R
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

Series No.:2055

- ② Category:W-Wafer
- ③ Connector Type:R-Right Angle 90°
- ④ Mounting Type:S-SMT
- ⑤ Pin No.:XX-02~05Pin
- ⑥ Plastic Material:9T-PA9T UL94V-0
- ⑦ Plating Code:SW1-Matte Tin
Underplate:Ni 40~120u"(1~3um) overall
Top Plating:Sn 80~200u"(2~5um) overall
- ⑧ Color:B-Black
- ⑨ Packing: R-Reel

No.of Pos.	Dimensions/mm					
	A	B	C	D	E	F
02	12.32	7.50	2.00	13.73	2.00	11.60
04	16.32	11.50	6.00	17.73	6.00	15.60
05	18.32	13.50	8.00	19.73	8.00	17.60



DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	GENERAL TOLERANCE		PROJECT	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
						.X	±0.35										
20250109	A0	/	Initial release	DingPing Ou	Larry Yang	.XX	±0.25						mm	1:1	1/1	A0	CD
						.XXX	±0.15										
						X.	±2°										

SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.




PART NO.		TITLE		UNIT		SCALE		SHEET		REV		NUMBER	
2055WRS-XX-9TSW1BR		2.00mm WTB CONN		mm		1:1		1/1		A0		CD	

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005
of Environmental&Material Management Rules

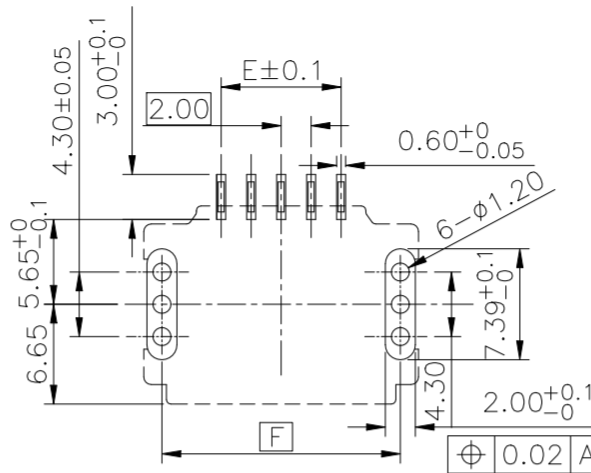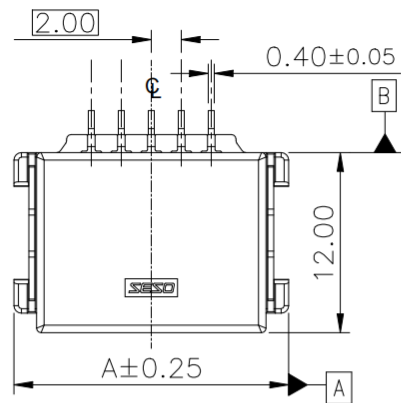

PCB THICKNESS :1.6
GENERAL TOLERANCES:±0.05

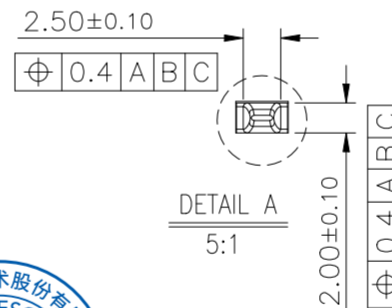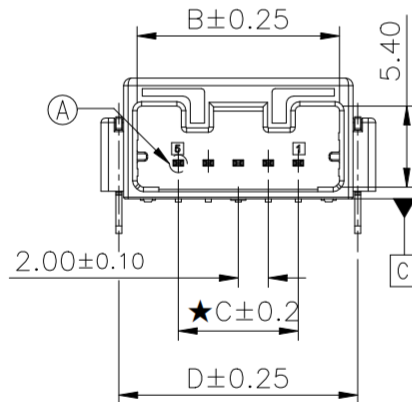

Specifications :

- Voltage rating: 60V Max. AC/DC
- Current rating: 5A(Mono-Pole Power Supply)
2A (All-Pole Power supply)
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Material(Pin): Brass
- Mates With SESO Housing: 2055A
- Symbols for SPC dimensions: "★"
- Product Specification: PS-2055-1
- Packaging: see SESO drawing
PK-2055WRS-XXC-9TSW1BR

2055 W R S-XX C-9T SW1 B R
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.:2055
- ② Category:W-Wafer
- ③ Connector Type:R-Right Angle 90°
- ④ Mounting Type:S-SMT
- ⑤ Pin No.:XX-02~05Pin
- ⑥ Special NO.:C-With Harpoon
- ⑦ Plastic Material:9T-PA9T UL94V-0
- ⑧ Plating Code:SW1-Matte Tin
Underplate:Ni 40~120u"(1~3um) overall
Top Plating:Sn 80~200u"(2~5um) overall
- ⑨ Color:B-Black
- ⑩ Packing: R-Reel

No.of Pos.	Dimensions/mm					
	A	B	C	D	E	F
02	12.32	7.50	2.00	9.93	2.00	9.90
04	16.32	11.50	6.00	13.93	6.00	13.90
05	18.32	13.50	8.00	15.93	8.00	15.90



GENERAL TOLERANCE

.X ±0.35
.XX ±0.25
.XXX±0.15
X.' ±2'

PROJECT

SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.

APPROVAL CHECK DRAWN DATE

Jack Zhang Larry Yang DingPing Ou 2023/04/28

PART NO.
2055WRS-XXC-9TSW1BR

TITLE
2.00mm WTB CONN

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	CD

20250109	A0	/	Initial release	DingPing Ou	Larry Yang
----------	----	---	-----------------	-------------	------------

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL
------	-----	---------	-------------	--------	----------

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005
of Environmental&Material Management Rules

■ Specifications :

- Voltage rating: 60V Max. AC/DC
- Current rating: 5A(Mono-Pole Power Supply)
2A (All-Pole Power supply)
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: >100M Ω
- Contact resistance: <10m Ω
- After environmental testing: <20m Ω
- Material(Pin): Brass
- Mates With SESO Housing: 2055A
- Symbols for SPC dimensions: "★"
- Product Specification: PS-2055-1
- Packaging: See SESO drawing
PK-2055WVS-DXX-9TSW1BW

2055 W V S-D XX-9T SW1 B W
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.:2055
- ② Category:W-Wafer
- ③ Connector Type:V-Straight 180°
- ④ Mounting Type:S-SMT
- ⑤ Row No.:D-Double Row
- ⑥ Pin No.:XX-08~24Pin
- ⑦ Plastic Material:9T-PA9T UL94V-0
- ⑧ Plating Code:SW1-Matte Tin
Underplate:Ni 40~120u"(1~3um) overall
Top Plating:Sn 80~200u"(2~5um) overall
- ⑨ Color:B-Black
- ⑩ Packing:W-Reel,With Mylar

No.of Pos.	Dimensions/mm					
	A	B	C	D	E	F
08	8.00	10.00	19.42	16.20	20.83	18.70
12	12.00	14.00	23.42	20.20	24.83	22.70
16	20.00	18.00	29.42	26.20	30.83	28.70
20	24.00	26.00	35.42	32.20	36.83	34.70
24	28.00	30.00	39.42	36.20	40.83	38.70

GENERAL TOLERANCE

.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
X.' $\pm 2^\circ$

PROJECT

APPROVAL

SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.

APPROVAL

CHECK

DRAWN

DATE



PART NO.

2055WVS-DXX-9TSW1BW


TITLE

2.00mm WTB CONN




UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	CD

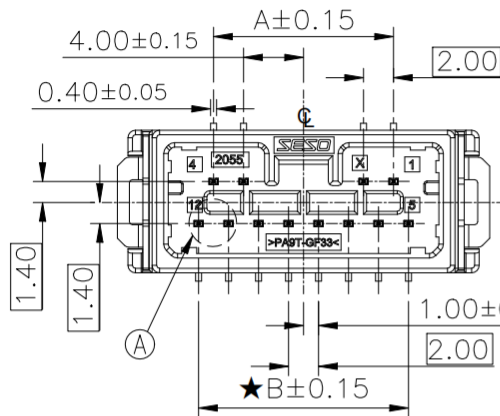

DETAIL A
5:1

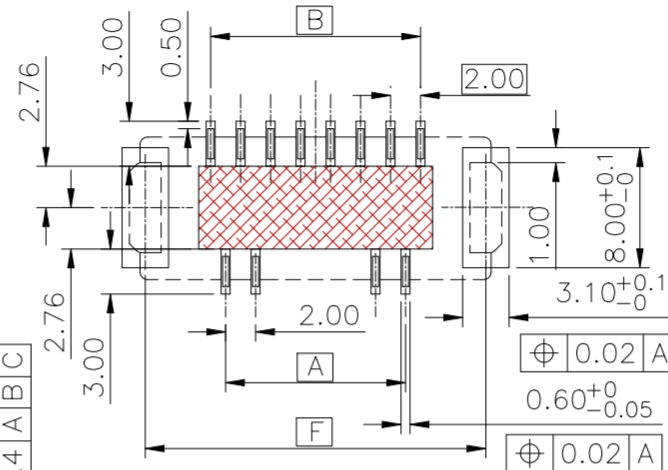

PCB THICKNESS :1.6
GENERAL TOLERANCES: ± 0.05

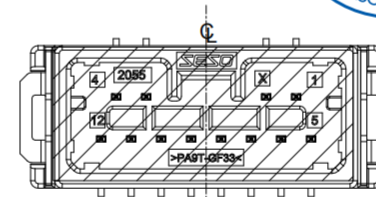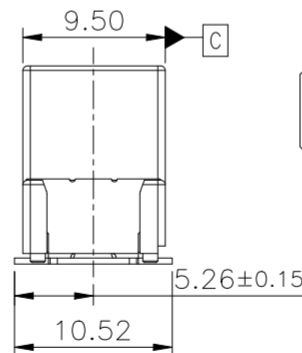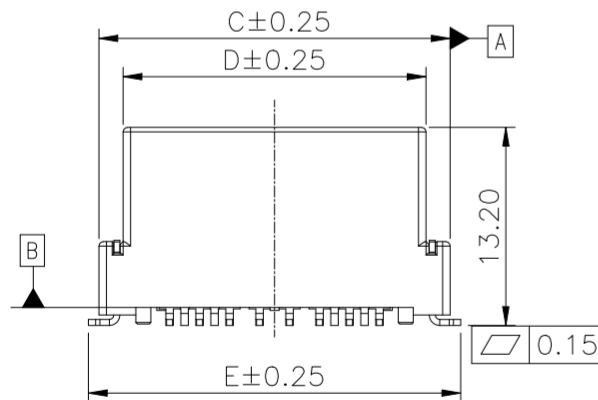







With Mylar

20250109 A0 / Initial release DingPing Ou Larry Yang

DATE REV ECN NO. DESCRIPTION MODIFY APPROVAL

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005
of Environmental&Material Management Rules

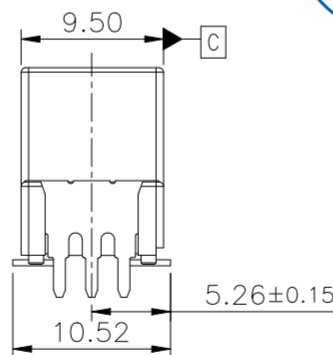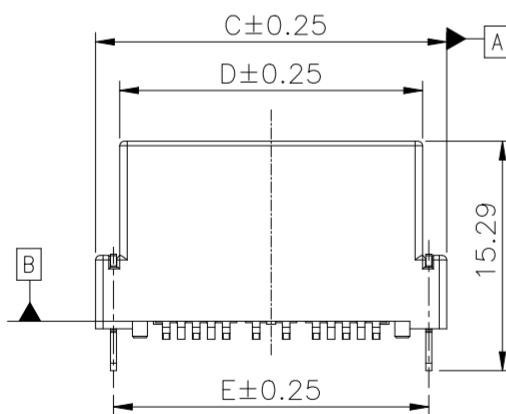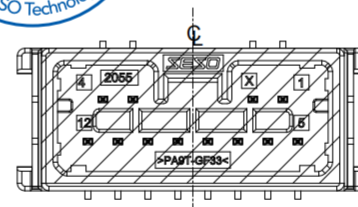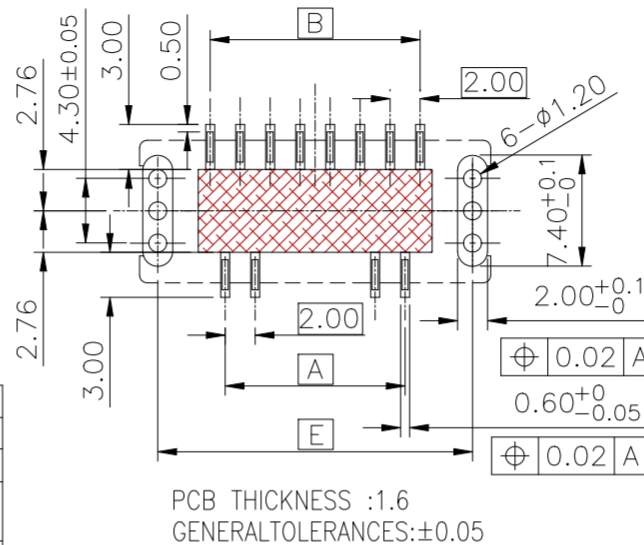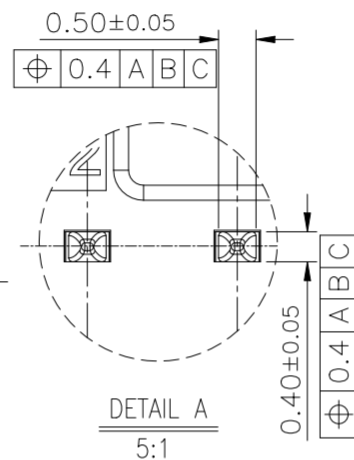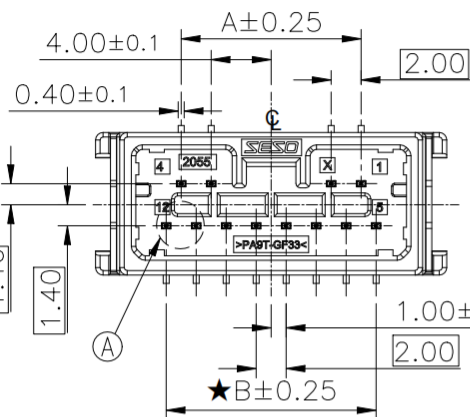

■ Specifications :

- Voltage rating: 60V Max. AC/DC
- Current rating: 5A(Mono-Pole Power Supply)
2A (All-Pole Power supply)
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Material(Pin): Brass
- Mates With SESO Housing: 2055A
- Symbols for SPC dimensions: "★"
- Product Specification: PS-2055-1
- Packaging: See SESO drawing
PK-2055WVS-DXXC-9TSW1BW

2055 W V S-D XX C-9T SW1 B W
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

- ① Series No.:2055
- ② Category:W-Wafer
- ③ Connector Type:V-Straight 180°
- ④ Mounting Type:S-SMT
- ⑤ Row No.:D-Double Row
- ⑥ Pin No.:XX-08~24Pin
- ⑦ Special NO.:C-With Harpoon
- ⑧ Plastic Material:9T-PA9T UL94V-0
- ⑨ Plating Code:SW1-Matte Tin
Underplate:Ni 40~120u"(1~3um)overall
Top Plating:Sn 80~200u"(2~5um)overall
- ⑩ Color:B-Black
- ⑪ Packing:W-Reel,With Mylar

No.of Pos.	Dimensions/mm				
	A	B	C	D	E
08	8.00	10.00	19.42	16.20	17.00
12	12.00	14.00	23.42	20.20	21.00
16	20.00	18.00	29.42	26.20	27.00
20	24.00	26.00	35.42	32.20	33.00
24	28.00	30.00	39.42	36.20	37.00

GENERAL TOLERANCE

.X ±0.35

.XX ±0.25

.XXX±0.15

X.' ±2'

PROJECT

APPROVAL

SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.

APPROVAL

CHECK

DRAWN

DATE

PART NO.

2055WVS-DXXC-9TSW1BW

TITLE

2.00mm WTB CONN

UNIT

SCALE

SHEET

REV

NUMBER

mm

1:1

1/1

A0

CD

20250109

A0

/

Initial release

DingPing Ou

Larry Yang

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

Jack Zhang



Larry Yang

DingPing Ou


2023/04/28

RoHS


This products can apply to the SESO Doc NO. QA-3-04-005
of Environmental&Material Management Rules

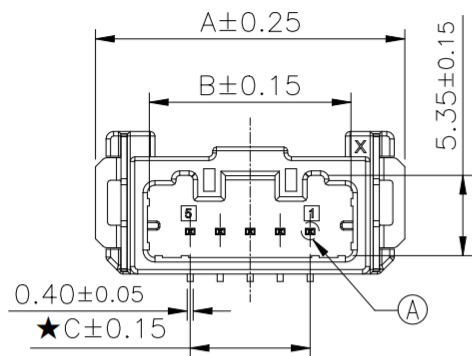




2Pin



4Pin

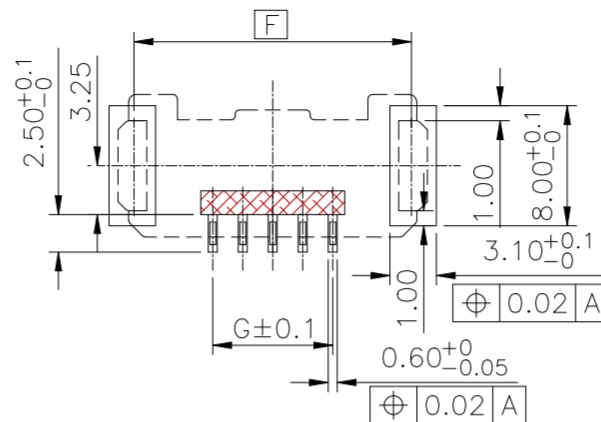

PCB THICKNESS :1.6
GENERAL TOLERANCES:±0.05

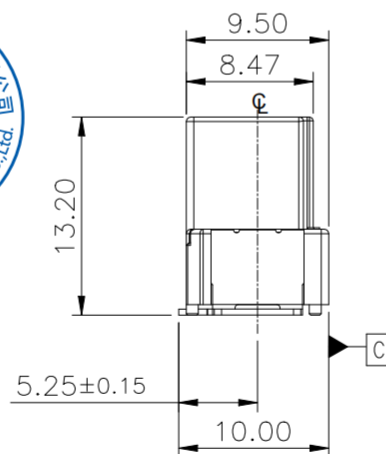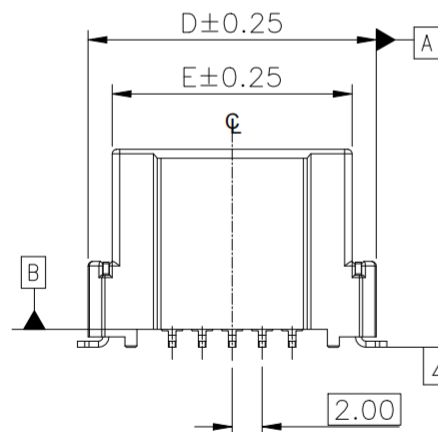

With Mylar

■ Specifications :

- Voltage rating: 60V Max. AC/DC
- Current rating: 5A(Mono-Pole Power Supply)
2A (All-Pole Power supply)
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Material(Pin): Brass
- Mates With SESO Housing: 2055A
- Symbols for SPC dimensions: " ★ "
- Product Specification: PS-2055-1
- Packaging: See SESO drawing
PK-2055WVS-XX-9TSW1BW

2055 W V S-XX-9T SW1 B W
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.:2055
- ② Category:W-Wafer
- ③ Connector Type:V-Straight 180°
- ④ Mounting Type:S-SMT
- ⑤ Pin No.:XX-Single Row-02~05Pin
- ⑥ Plastic Material:9T-PA9T UL94V-0
- ⑦ Plating Code:SW1-Matte Tin
Underplate:Ni 40~120u"(1~3um) overall
Top Plating:Sn 80~200u"(2~5um) overall
- ⑧ Color:B-Black
- ⑨ Packing:W-Reel,With Mylar

No.of Pos.	Dimensions/mm						
	A	B	C	D	E	F	G
02	14.63	7.45	2.00	13.22	10.00	12.50	2.00
04	18.63	11.45	6.00	17.22	14.00	16.50	6.00
05	20.63	13.45	8.00	19.22	16.00	18.50	8.00

GENERAL TOLERANCE

.X ±0.35

.XX ±0.25

.XXX±0.15

X.' ±2'

PROJECT

Jack Zhang

SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.

APPROVAL

CHECK

DRAWN

DATE

PART NO.

2055WVS-XX-9TSW1BW

TITLE

2.00mm WTB CONN

UNIT

SCALE

SHEET

REV

NUMBER

mm

1:1

1/1

A0

CD

20250109

A0

/

Initial release

DingPing Ou

Larry Yang

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

PROJECT

Jack Zhang



Larry Yang

DingPing Ou


2023/04/28

RoHS



This products can apply to the SESO Doc NO. QA-3-04-005
of Environmental&Material Management Rules







2Pin

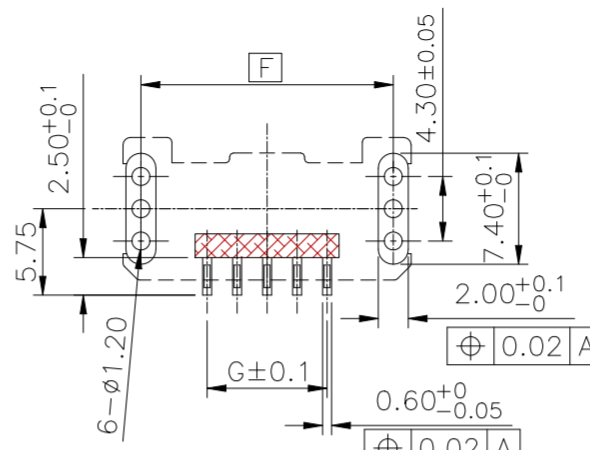

PCB THICKNESS :1.6
GENERAL TOLERANCES:±0.05

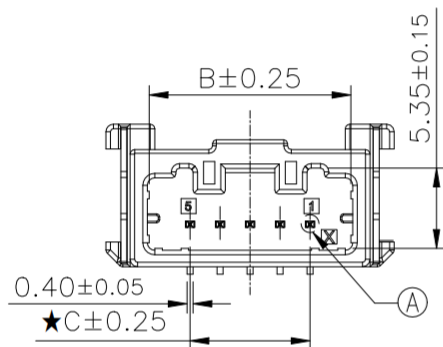

4Pin

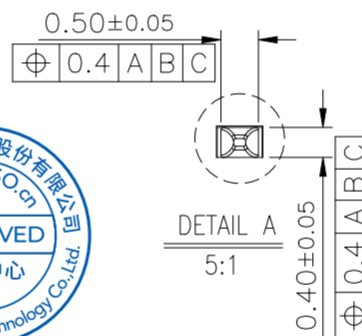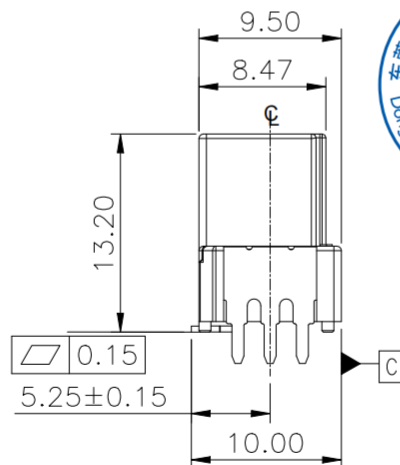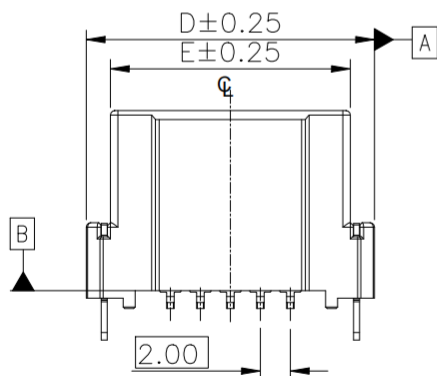DETAIL A
5:1

With Mylar

■ Specifications :

- Voltage rating: 60V Max. AC/DC
- Current rating: 5A(Mono-Pole Power Supply)
2A (All-Pole Power supply)
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: ≥100MΩ
- Contact resistance: <10mΩ
- After environmental testing: <20mΩ
- Material(Pin): Brass
- Mates With SESO Housing: 2055A
- Symbols for SPC dimensions: " ★ "
- Product Specification: PS-2055-1
- Packaging: see SESO drawing
PK-2055WVS-XXC-9TSW1BW

2055 W V S-XX C-9T SW1 B W
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.:2055
- ② Category:W-Wafer
- ③ Connector Type:V-Straight 180°
- ④ Mounting Type:S-SMT
- ⑤ Row No.-Pin No.:XX-Single Row-02~05Pin
- ⑥ Special NO.:C-With Harpoon
- ⑦ Plastic Material:9T-PA9T UL94V-0
- ⑧ Plating Code:SW1-Matte Tin
Underplate:Ni 40~120u"(1~3um) overall
Top Plating:Sn 80~200u"(2~5um) overall
- ⑨ Color:B-Black
- ⑩ Packing:W-Reel,With Mylar

No.of Pos.	Dimensions/mm						
	A	B	C	D	E	F	G
02	10.80	7.45	2.00	13.22	10.00	10.80	2.00
04	14.80	11.45	6.00	17.22	14.00	14.80	6.00
05	16.80	13.45	8.00	19.22	16.00	16.80	8.00

GENERAL TOLERANCE

.X ±0.35

.XX ±0.25

.XXX±0.15

X.' ±2'

PROJECT

PROJECT

SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.

PART NO.

2055WVS-XXC-9TSW1BW

TITLE

2.00mm WTB CONN

UNIT

mm

SCALE

1:1

SHEET

1/1

REV

A0

NUMBER

CD

20250109

A0

/

Initial release

DingPing Ou

Larry Yang

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

APPROVAL

CHECK

DRAWN

DATE

Jack Zhang

Larry Yang

DingPing Ou

2023/04/28